Starck 3

Mounting instructions
安装说明

Two-piece toilet, Dual flush
分体式座便器，双冲水

2181.9..00 + # 0920800085

Important information 4

重要说明 5

Installation, 安装 6

Important information

en

Regarding the mounting instructions

These mounting instructions come as part of the Duravit product and should be read carefully prior to installation.

Explanation of the key words and symbols

CAUTION — Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.

NOTICE — Is used to address practices not related to physical injury.

Inspection (e.g. for scratches)

Check for leaks and leak-tightness

Target readership and qualifications

The toilet must be installed by certified plumber.

CAUTION **Risk of physical injury, product damage or potential damage!**

> Local installation regulations and any country-specific standards must be observed at all times.

Safety information

CAUTION **Risk of personal injury or breakage through fragile product!**

> 2 people are recommended of handling.
> Handle with care.

NOTICE **Risk of product damage!**

> Overtightening may cause breakage or chipping of vitreous china.
> Handle with care.

NOTICE **Risk of external leakage!**

> Do not lift or rock the toilet after placement.
> If you break the watertight seal, you must install a new wax seal.

Water installation

HET (high efficiency toilet):

- with dual flush: 1.18/0.8 gpf / 4.5/3 lpf

Operation pressure:
Recommended: 25 – 80 psi / 172 – 550 kPA

Installation information

Please read pre-installation datasheets prior to the installation. These are available to download on the Internet at www.duravit.com.

重要说明

zh

关于安装说明

此安装说明是 Duravit 产品的一部分，安装前应仔细阅读。

关于关键词与符号的说明

注意 表示如不避免可能会导致轻微或中度伤害的危险情况。

公告 用于表示与身体伤害无关的操作实践。

要求视检（比如检查划痕）

检查泄漏和密封性

目标读者和安装人员资格

坐便器须由经认证的管道工安装。

注意 身体伤害、产品损坏或潜在损坏风险！

> 请务必遵守所在国家/地区的标准和当地安装规章条例。

安全信息

注意 易碎产品破损或人身伤害风险！

> 建议由两人同时处理。
> 请谨慎操作。

公告 产品损坏风险！

> 过紧可能会导致玻璃陶瓷破损或碎裂。
> 请谨慎操作。

公告 外部泄漏风险！

> 放置妥当后，请勿抬起或摇动坐便器。
> 如果您损坏了防水密封盖，必须安装一个新的蜡封。

水管安装

HET（高效坐便器）：

- 双重冲洗：1.18/0.8 gpf / 4.5/3.0 lpf

工作压强：
建议压强：25 – 80 psi/172 – 550 kPA

安装说明

安装前请注意查看装前数据表。 数据表可从 www.duravit.com 下载。

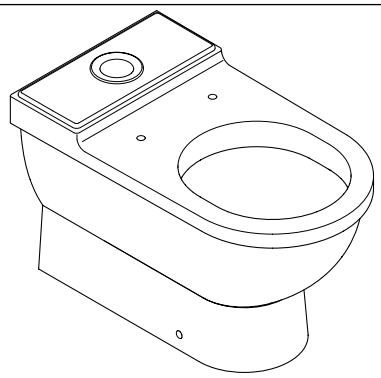



0050770000

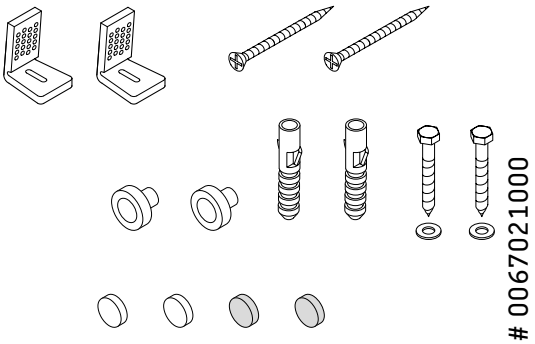

0067021000

2181.9..00

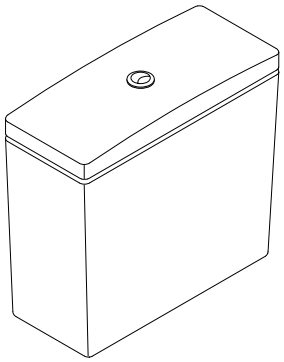



0920800085

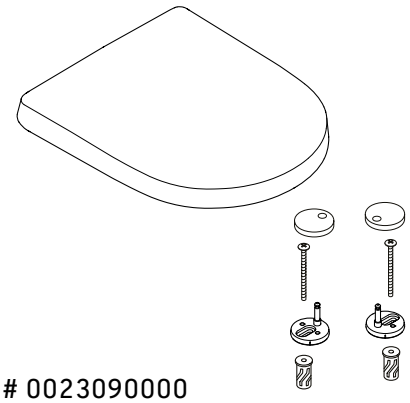

0023090000

1

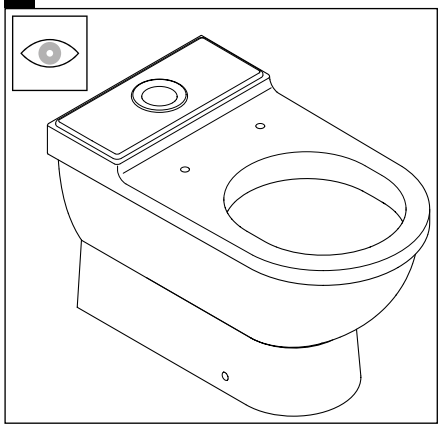

2

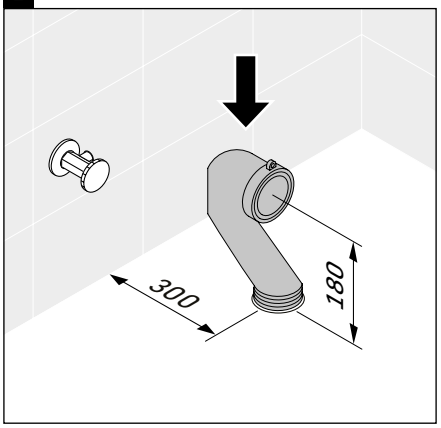

3

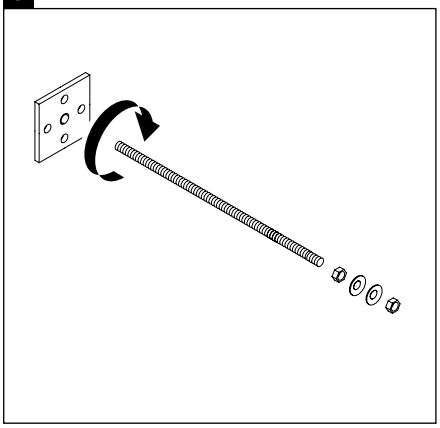

4

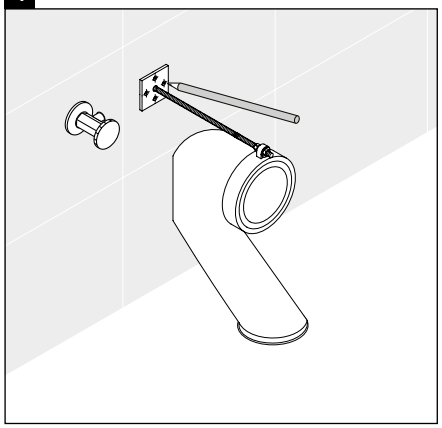

5

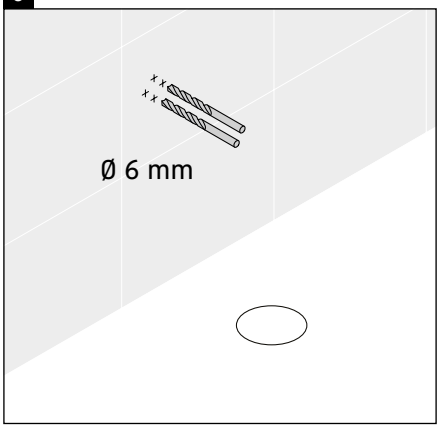

6

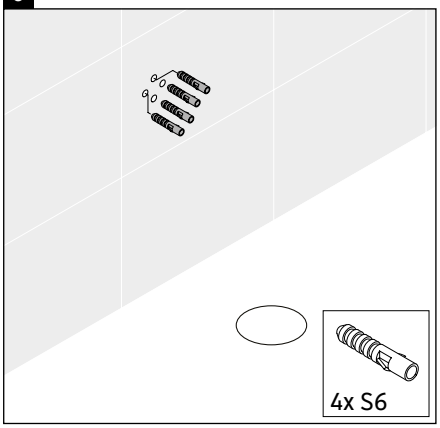

7

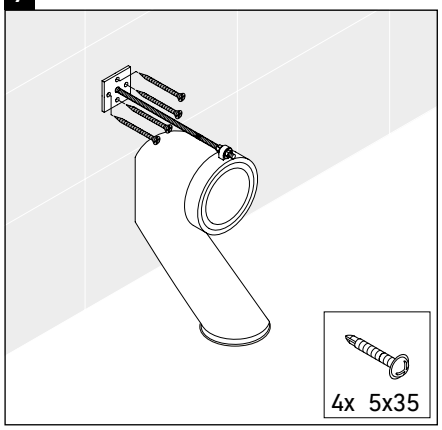

8

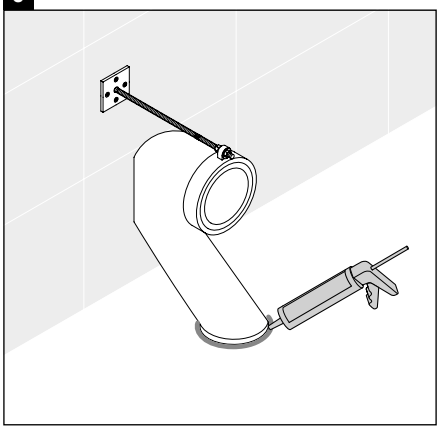

9

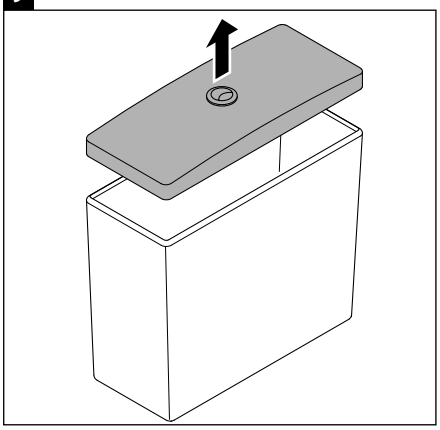

10

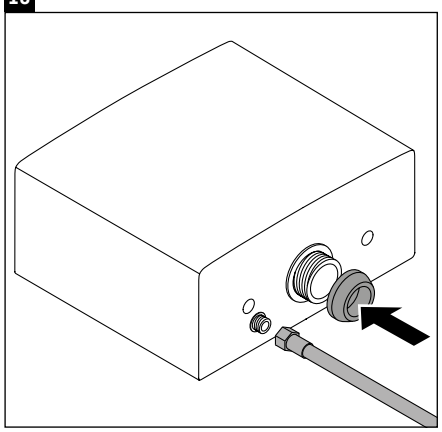

11

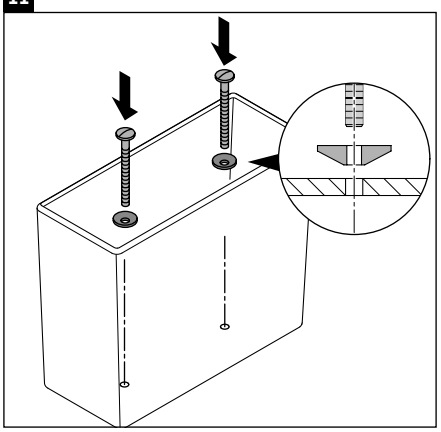

12

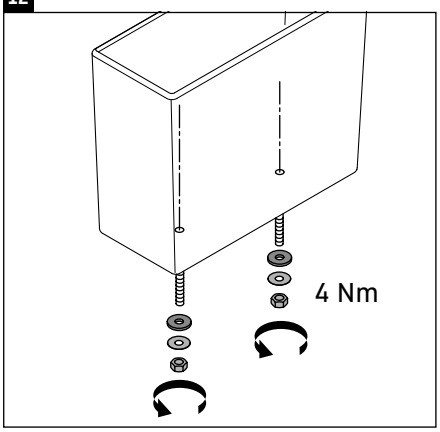

13

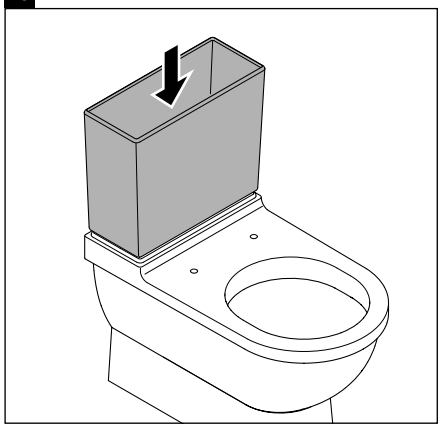

14

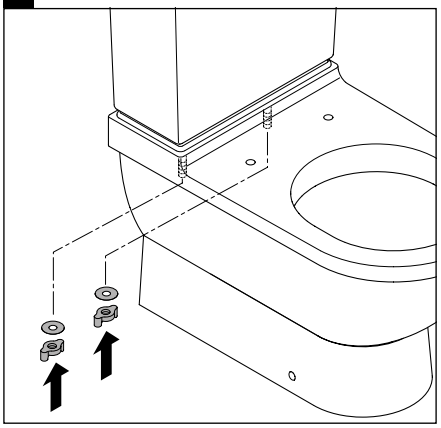

15

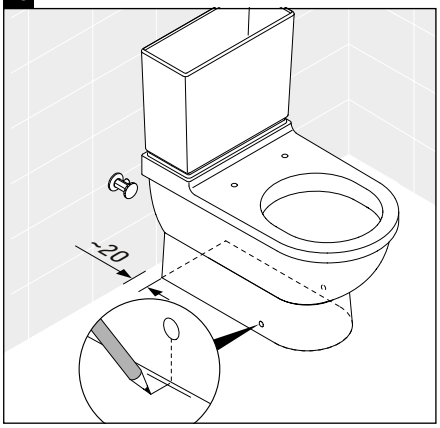

16

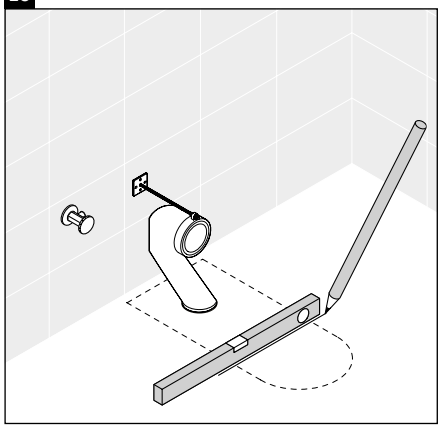

17

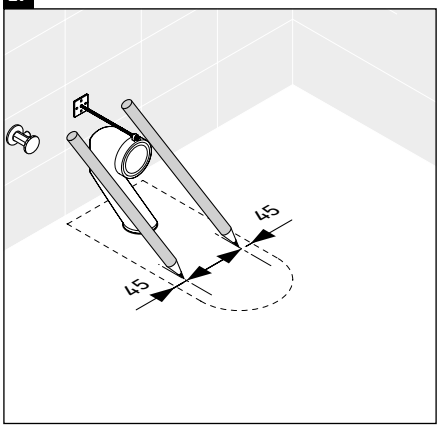

18

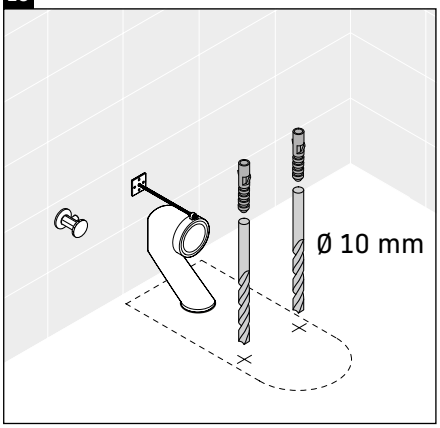

19

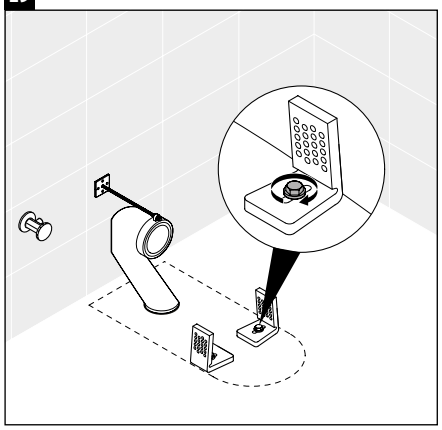

20

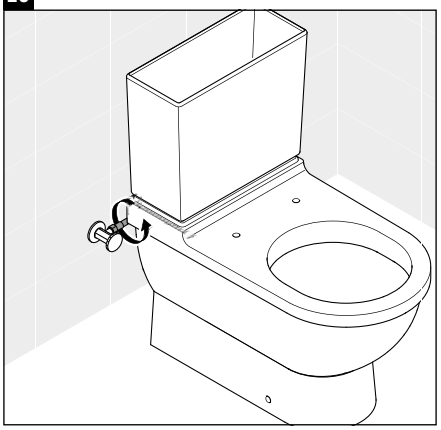

21

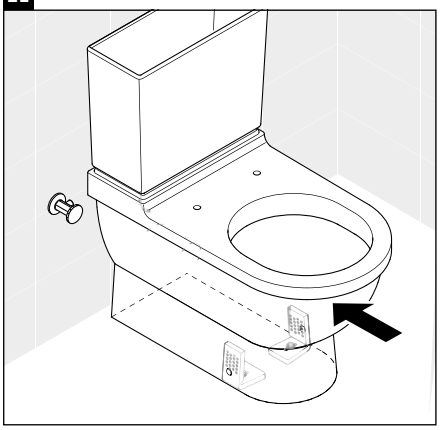

22

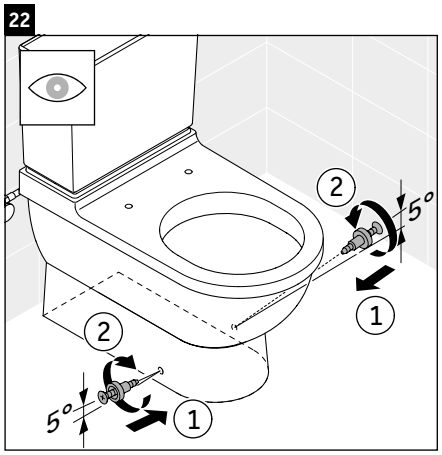

23

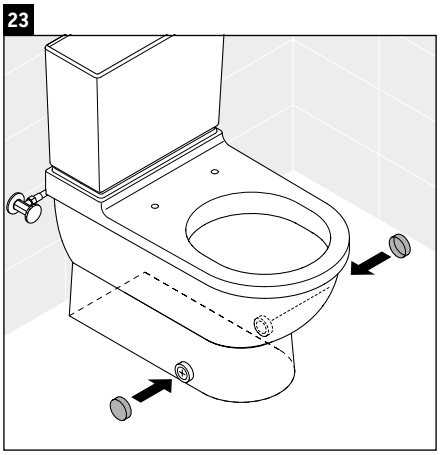

24

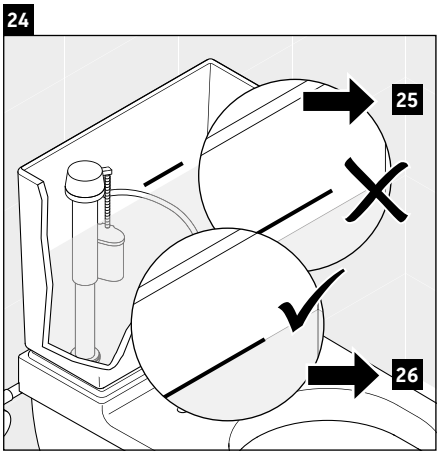

25

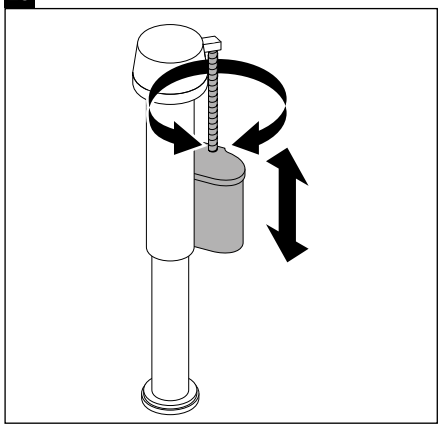

26

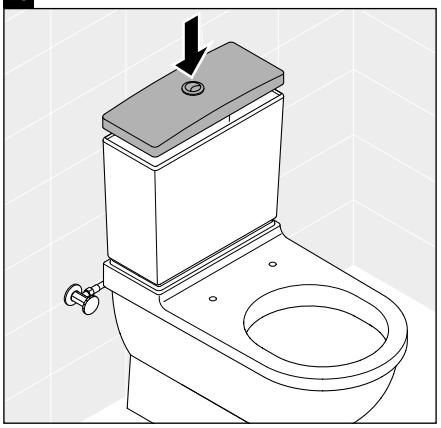

27

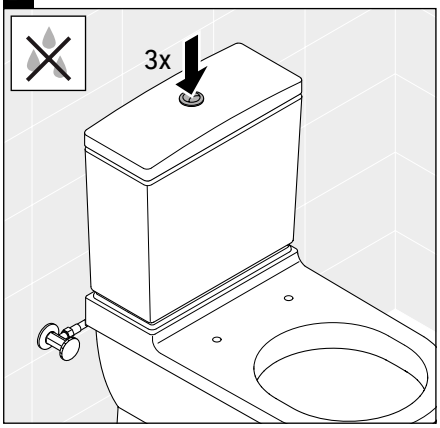

28

29

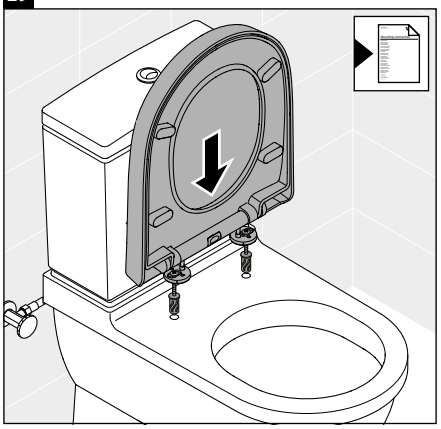

Duravit AG
P.O. Box 240
Werderstr. 36
78132 Hornberg
Germany
Phone +49 78 33 70 0
Fax +49 78 33 70 289
info@duravit.com
www.duravit.com

Best.-Nr. 57152/18.09.3 We reserve the right to make technical improvements and enhance the appearance of the products shown.